


# NO-B4 Nitric Oxide Sensor 4-Electrode



Figure 1 NO-B4 Schematic Diagram

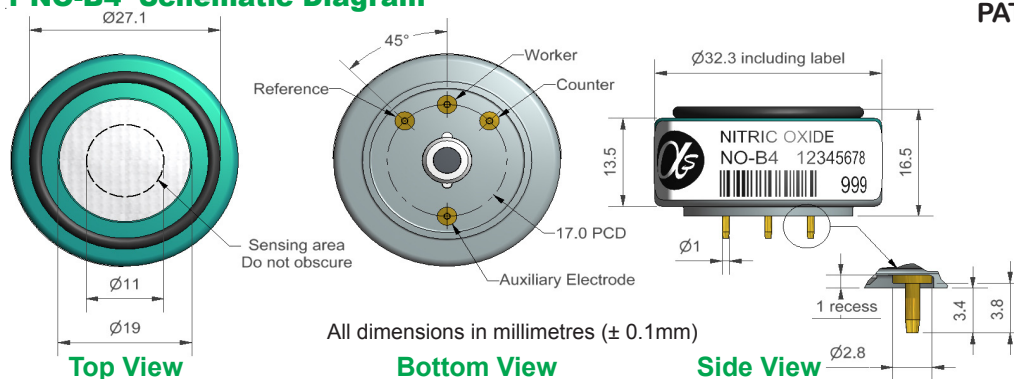

PATENTED

## PERFORMANCE

Sensitivity	nA/ppm at 2ppm NO	500 to 850
Response time	$t_{90}$ (s) from zero to 2ppm NO	< 45
Zero current	nA in zero air at 20°C	30 to 140
Noise*	$\pm 2$ standard deviations (ppb equivalent)	15
Range	ppm NO limit of performance warranty	20
Linearity	ppb error at full scale, linear at zero and 5ppm NO	< $\pm 1$
Overgas limit	maximum ppm for stable response to gas pulse	50

\* Tested with Alphasense ISB low noise circuit

## LIFETIME

Zero drift	ppb equivalent change/year in lab air	0 to 50
Sensitivity drift	% change/year in lab air, monthly test	0 to -20
Operating life	months until 50% original signal (24 month warranted)	> 24

## ENVIRONMENTAL

Sensitivity @ -20°C	(% output @ -20°C/output @ 20°C) @ 2ppm NO	60 to 90
Sensitivity @ 40°C	(% output @ 50°C/output @ 20°C) @ 2ppm NO	97 to 110
Zero @ -20°C	nA	0 to 30
Zero @ 40°C	nA	100 to 200

## CROSS SENSITIVITY

H <sub>2</sub> S sensitivity	% measured gas @ 5ppm	H <sub>2</sub> S (after 3 minutes)	< 10
NO <sub>2</sub> sensitivity	% measured gas @ 5ppm	NO <sub>2</sub> (after 3 minutes)	< 4
Cl <sub>2</sub> sensitivity	% measured gas @ 5ppm	Cl <sub>2</sub>	< 3
SO <sub>2</sub> sensitivity	% measured gas @ 5ppm	SO <sub>2</sub>	< 5
H <sub>2</sub> sensitivity	% measured gas @ 100ppm	H <sub>2</sub>	< 0.1
CO sensitivity	% measured gas @ 5ppm	CO	< 0.3
NH <sub>3</sub> sensitivity	% measured gas @ 5ppm	NH <sub>3</sub>	< 0.1
CO <sub>2</sub> sensitivity	% measured gas @ 5% Vol	CO <sub>2</sub>	< 0.1
O <sub>3</sub> sensitivity	% measured gas @ 100ppb	O <sub>3</sub>	< 4
Halothane sensitivity	@ 100ppm	Halothane	< 0.1

## KEY SPECIFICATIONS

Bias voltage	mV (working electrode potential is above reference electrode)	+200
Temperature range	°C	-30 to 40
Pressure range	kPa	80 to 120
Humidity range	% rh continuous	15 to 85
Storage period	months @ 3 to 20°C (stored in sealed pot)	6
Load resistor	$\Omega$ (ISB circuit is recommended)	33 to 100
Weight	g	< 13



At the end of the product's life, do not dispose of any electronic sensor, component or instrument in the domestic waste, but contact the instrument manufacturer, Alphasense or its distributor for disposal instructions.

NOTE: all sensors are tested at ambient environmental conditions, with 10 ohm load resistor, unless otherwise stated. As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.

Technical Specification

# NO-B4 Performance Data

Technical Specification

**Figure 2 Sensitivity Temperature Dependence**

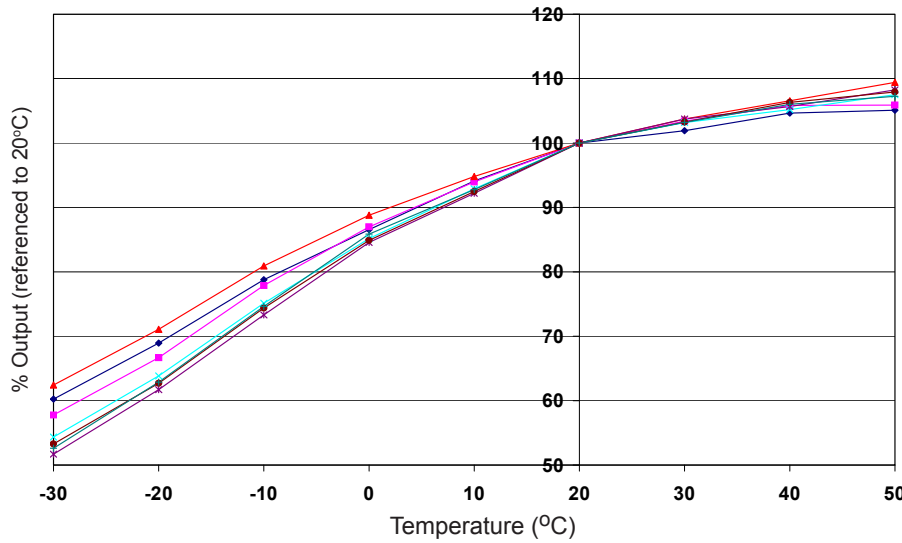


Figure 2 shows the temperature dependence of sensitivity at 2ppm NO.

This data is taken from a typical batch of sensors.

**Figure 3 Zero Temperature Dependence**

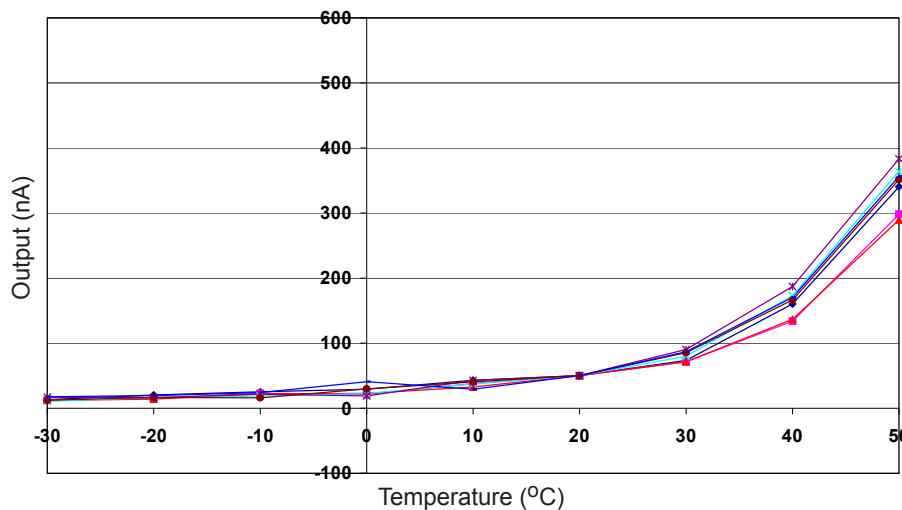


Figure 3 shows the variation in zero output of the working electrode caused by changes in temperature, expressed as nA.

This data is taken from a typical batch of sensors.

Contact Alphasense for further information on zero current correction.

**Figure 4 Response to 200ppb NO**

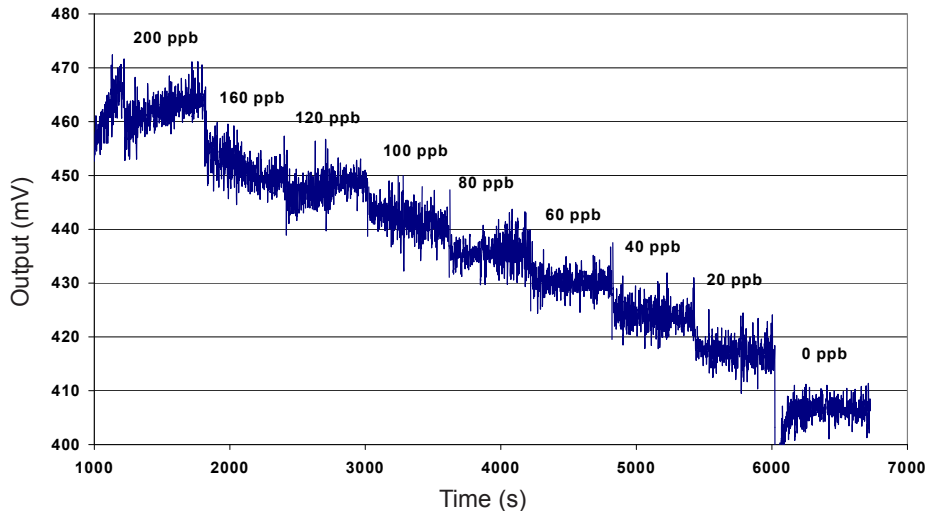


Figure 4 shows response to 200ppb NO.

Use of Alphasense ISB circuit reduces noise to 15ppb with the opportunity of digital smoothing to reduce noise even further