Sensorex New "Calomel Free" Epoxy and Glass Body pH and Reference Electrodes



Specifications

pH Range	0-14 (Na+ error >12.3 pH)
Speed of Response	95% in 1 second
Isopotential Point	pH 7.00 (0 mV)
Offset	+/- 0.20 pH
Span	97% or higher
Temperature Range	0 - 60 Degrees C
Cable Length	30" (0.76 m)
Connectors	BNC for combination ("CIT"), 2mm pin for reference ("RIT")

Fast Response...No Silver Ion Contamination

Use in Place of Calomel pH and Reference Electrodes

Combination Triple Junction Design

Uses No Hazardous Calomel Based Material (MERCURY-FREE!)/RoHS compliant

Sealed and Refillable Models

Glass and Epoxy Body Models

Calomel Free pH electrodes!

The performance of a Calomel electrode is now available without the hazardous Mercury associated with the design. The "Calomel Free" design features an Ag/AgCl based double junction reference with a unique *silver ion trap* acting as a third junction to impede any silver ion contact with the sample. Reference output is adjusted to deliver the same output as a Calomel electrode using a silver chloride reference.

Glass or Plastic Body Electrodes!

Traditionally, pH electrodes have been made of all glass construction. However, today's thermoplastics are able to construct pH electrodes with durable and chemically resistant bodies to reduce any breakage. The protected design of the plastic body electrode extends over the measuring surface, making the pH glass bulb virtually unbreakable.

Sealed vs. Refillable Reference!

Both sealed and refillable styles are available. Sealed references are gel-filled and maintenance free while refillable designs extend electrode life by having a refillable reference electrolyte.

Parts covered by this product data sheet include: S200CIT, SG200CIT, S201CIT, SG201CIT, S300CIT, SG300CIT, S900CIT, SG900CIT, S200RIT, SG201RIT


iSweek www.isweek.com

Add: 16/F, Bldg. #3, Zhongke Mansion, No.1 Hi-Tech S. Rd, Hi-Tech Park South, Shenzhen, Guangdong, 518067 P.R.China

Tel: + 86-755-83289036 Fax: + 86-755-83289052

Sweek.com

Sensorex New "Calomel Free" Epoxy and Glass Body pH Electrodes

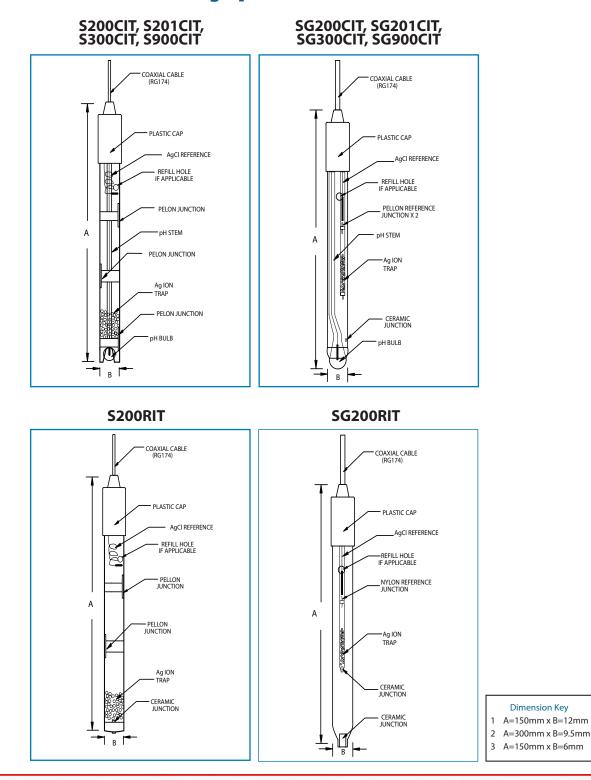

Sweek www.isweek.com

Add: 16/F, Bldg. #3, Zhongke Mansion, No.1 Hi-Tech S. Rd, Hi-Tech Park South, Shenzhen, Guangdong, 518067 P.R.China

Tel: + 86-755-83289036 Fax: + 86-755-83289052

E-mail: sales@isweek.com

Sensorex New "Calomel Free" Epoxy and Glass Body pH Electrodes

ORDERING INFORMATION

pH Electrodes

Part No.	Size	Dimension (see page 2)
S200CIT	12mm x 150mm Plastic Sealed Reference	1
SG200CIT	12mm x 150mm Glass Sealed Reference	1
S201CIT	12mm x 150mm Plastic Re-fillable Reference	1
SG201CIT	12mm x 150mm Glass Re-fillable Reference	1
S300CIT	9.5mm x 300mm Plastic Sealed Reference	2
SG300CIT	9.5mm x 300mm Glass Sealed Reference	2
S900CIT	6mm x 150mm Plastic Sealed Reference	3
		_
SG900CIT	6mm x 150mm Glass Sealed Reference	3
SG900CIT Reference Electrodes Part No.	6mm x 150mm Glass Sealed Reference Size	3 Dimension (see page 2)
Reference Electrodes		
Reference Electrodes Part No.	Size	Dimension (see page 2)
Reference Electrodes Part No. S200RIT	Size 12mm x 150mm Plastic Sealed Reference only	Dimension (see page 2) 1
Reference Electrodes Part No. S200RIT SG201RIT	Size 12mm x 150mm Plastic Sealed Reference only	Dimension (see page 2) 1

İSweek www.isweek.com Add: 16/F, Bldg. #3, Zhongke Mansion, No.1 Hi-Tech S. Rd, Hi-Tech Park South, Shenzhen, Guangdong, 518067 P.R.China Tel: + 86-755-83289036 Fax: + 86-755-83289052 E-mail: sales@isweek.com