



CO-H4X Carbon Monoxide Sensor – Miniature Size



Side View

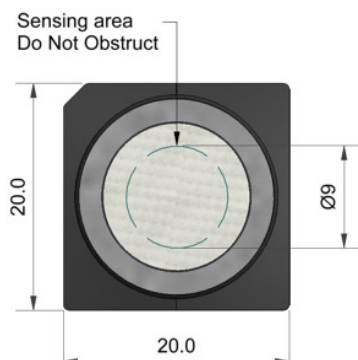

Top View

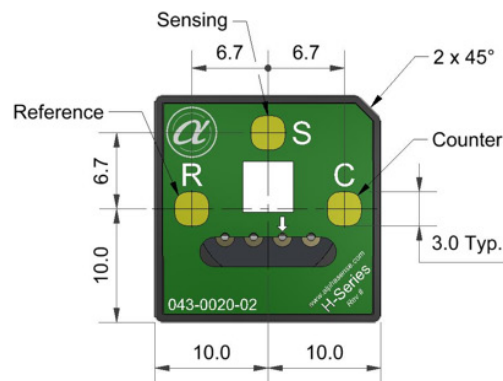

Bottom View

Dimensions are in millimetres (± 0.1 mm).

Performance			
	Sensitivity	nA/ppm in 400ppm CO	18 to 45
	Response time	t90 (s) from zero to 400ppm CO % 22°C	< 25
	Zero current	ppm equivalent in zero air	< ± 4
	Resolution	RMS noise (ppm equivalent)	< 1.5
	Range	ppm limit of performance warranty	1,000
	Linearity	ppm CO error at full scale, linear at zero and 400ppm CO	± 40
	Overgas limit	maximum ppm for stable response to gas pulse	2,000

Lifetime			
	Zero drift	ppm equivalent change/year in lab air	< 0.5
	Sensitivity drift	% change/year in lab air, monthly test	< 6
	Operating life	months until 80% original signal (18-month warranted)	> 18

Environmental			
	Sensitivity @ -20°C	% (output @ -20°C/output @ 20°C) @ 400ppm CO	N/A
	Sensitivity @ 50°C	% (output @ 50°C/output @ 20°C) @ 400ppm CO	N/A
	Zero @ -20°C	ppm equivalent change from 20°C	< ± 2
	Zero @ 50°C	ppm equivalent change from 20°C	< ± 4

Cross Sensitivity				
	Filter capacity	ppm·hrs	H ₂ S	20,000
	H ₂ S sensitivity	% measured gas @ 20ppm	H ₂ S	< 0.1
	NO ₂ sensitivity	% measured gas @ 10ppm	NO ₂	< 6
	Cl ₂ sensitivity	% measured gas @ 10ppm	Cl ₂	< 0.1
	NO sensitivity	% measured gas @ 50ppm	NO	< 60
	SO ₂ sensitivity	% measured gas @ 20ppm	SO ₂	< 0.1
	H ₂ sensitivity	% measured gas @ 400ppm	H ₂	< 10
	C ₂ H ₄ sensitivity	% measured gas @ 400ppm	C ₂ H ₄	< 110
	NH ₃ sensitivity	% measured gas @ 20ppm	NH ₃	< 0.1

Key Specifications			
	Temperature range	°C	-20 to 50
	Pressure range	kPa	80 to 120
	Humidity range	% rh (see note below)	15 to 90
	Storage period	months @ 3 to 20°C (stored in sealed pot)	6
	Load resistor	Ω (recommended)	10 to 47
	Weight	g	< 2