

UV Radiometer 5.0

GUVx-T1xGS5-LA5

Description

Display : Absolute Power (AP), Relative Power (RP), and Accumulative Time (AT)

Output : DC Voltage, Current, and Relay

Constitution

Display, Sensor Probe, Cable



Fig. 1 UV Radiometer 5.0 (Size of Display : 97 × 50 × 112mm³)

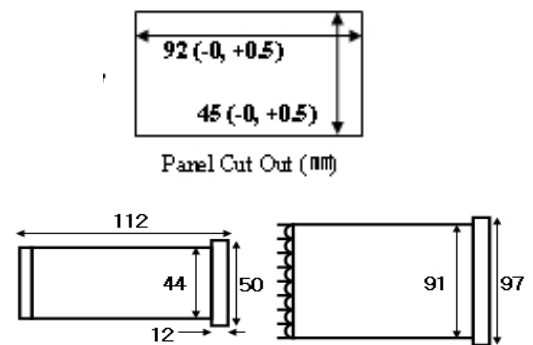


Fig. 2 Size of UV Radiometer 5.0

Sensor Probe Dimensions

Size	Hole size / Interval	Hole location (mm)	Window	Weight	Material
36 × 30 × 16 mm ³	4mm Tab×8 mm / 22 mm	Vertical 18:18, Horizom4:22:4	12 mm	40 g	AL-60

Absolute Maximum Ratings

Parameter	Value	Unit	Remark
Operating Temperature	-30 ~ 85	°C	Sensor Probe
	0 ~ 50	°C	Display
Working humidity	35 ~ 85	%RH	Display
Power Supply	85 ~ 265	VAC	50/60 Hz

Parameter	Min.	Peak	Max.	Unit	Remark	
Detection Power Range	0		19,999	$\mu\text{W}/\text{cm}^2$		
Detection Range	GUVV-T10GS5-LA5	230	350	395	nm	10% of Max
	GUVB-T11GS5-LA5	220	300	320	nm	
	GUVC-T10GS5-LA5	220	254	280	nm	
	GVBL-T12GS5-LA5	330	385	445	nm	

Function

1. Display : Absolute Power ($\mu\text{W}/\text{cm}^2$), Relative Power (%), and Accumulative Time (Hours).
2. Output : DC Voltage (1~5V DC), DC Current (4-20 mA, 300 Ω max load), Relay (NC/NO, 250VAC 3A/30VDC 3A)