



Dynamic Pressure Sensors

Model P-308-C


The Columbia Model P-308-C Piezoelectric Microphone is designed to measure a wide range of varying high intensity sound pressure levels from 110 dB to 190 dB. Incorporating a unique “opposing” seismic system design, the unit is effectively insensitive to external vibration environments. This microphone offers unusually high charge sensitivity, wide frequency response and excellent linearity.

The Model P-308-C features a compact design weighing less than 20 grams. The advanced stainless steel case design assures exceptional mechanical isolation and rugged construction for use under the most severe environmental conditions. *Consult the factory for customized versions of this sensor.*

- High Intensity Acoustic Microphone
- Operational Range 100 To 190 dB
- Vibration Compensated

Specifications

Transfer / Electrical	P-308-C
Charge Sensitivity	4 pC rms Min.
Pressure Range	100 To 190 dB
Pressure Overload (without damage)	30 psi
Frequency Linearity	+/-2 dB, 5 To 6,000 Hz +/-3 dB, 6,000 To 10,000 Hz
Resonant Frequency	27 KHz Min.
Amplitude Linearity	+/-0.5 dB of Full Scale SPL over Dynamic Range
Capacitance	3600 pF (Nominal)
Output Resistance	1 x 10 ⁴ Megohms
Grounding	Isolated
Environmental	
Temperature Range	-100 To +300 Deg F (-73 To +150 Deg C)
Humidity ¹	0 To 100% R.H.
Vibration Limit	100 g Max.
Shock Limit	100 g Max.
Physical	
Size	0.740 In. Dia. x 0.770 In. H (19.0 mm Dia x 19.6 mm H)
Weight	0.67 Oz (19 Gm)
Material	
Body & Diaphragm	Type 316 Stainless Steel
Electrical Interface	#10-32 Coaxial Connector
Mounting	Clamps Supplied for Rigid Mounting

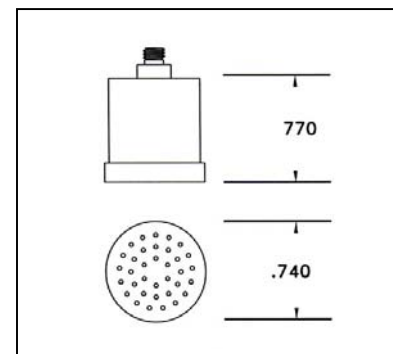

NOTES:

¹ With Connector Mated or Protected, Unit is Hermetically Sealed.

Accessories Supplied:

- (1) Cable Assembly, LNHT-3 Ft.
- (1) Hardwood Storage Box
- (1) Standard Calibration Data.