



MSP300

Pressure Transducer

SPECIFICATIONS

- Analog Output or 14-Bit Digital Pressure with 11-Bit Temperature Output
- One Piece Stainless Steel Construction
- Low Cost
- 17-4PH or 316L Stainless Steel
- Customizable

The MSP300 pressure transducer from the Microfused line of TE is suitable for measurement of liquid or gas pressure, even for difficult media such as contaminated water, steam, and mildly corrosive fluids.

The transducer pressure cavity is machined from a solid piece of 17-4PH or 316L stainless steel. The standard version includes a 1/4 NPT pipe thread allowing a leak-proof, all metal sealed system. With excellent durability, there are no o-rings, welds or organics exposed to the pressure media.

TE's proprietary Microfused technology, derived from demanding aerospace applications, employs micromachined silicon piezoresistive strain gages fused with high temperature glass to a stainless steel diaphragm. This approach achieves media compatibility simply and elegantly while providing an exceptionally stable sensor without the PN junctions of conventional micromachined sensors.

This product is geared towards industrial and commercial OEMs for small to high volume applications. Standard configurations are suitable for many applications. Please contact factory for your customization needs.

FEATURES

- One Piece Stainless Steel Construction
- Ranges up to 15kpsi
- Digital Pressure and Temperature Output or Analog mV/Amplified Output
- ± 1 %Span Accuracy
- UL Certification (analog only)

APPLICATIONS

- Pumps and Compressors
- Hydraulic/Pneumatic Systems
- Automotive Test Systems
- Energy and Water Management
- Medical Gas Pressure
- Leak Detection
- Remote Measuring Systems
- General Pressure Measurements

STANDARD RANGES (ALL INTERMEDIATE RANGES ARE STANDARD)

| Range (psi) | Range (Bar) | Gage/Compound |
|-------------|-------------|---------------|
| 0 to 100 | 0 to 007 | • |
| 0 to 200 | 0 to 010 | • |
| 0 to 300 | 0 to 020 | • |
| 0 to 500 | 0 to 035 | • |
| 0 to 01k | 0 to 070 | • |
| 0 to 03k | 0 to 200 | • |
| 0 to 05k | 0 to 350 | • |
| 0 to 10k | 0 to 700 | • |
| 0 to 15k | 0 to 01k | • |

PERFORMANCE SPECIFICATIONS (ANALOG)

Supply Voltage: 5.0V, Ambient Temperature: 25°C (unless otherwise specified)

| PARAMETERS | MIN | TYP | MAX | UNITS | NOTES |
|--|---|-----|------|---------------|-----------------|
| Pressure Accuracy (RSS combined Non Linearity, Hysteresis & Repeatability) | -1 | | 1 | %Span | BFSL @ 25°C |
| Pressure Cycles | 1.00E+6 | | | 0-F.S. Cycles | |
| Proof Pressure | 2X | | | Rated | |
| Burst Pressure | 5X | | | Rated | |
| Isolation, Body to Any Lead | 50 | | | MΩ | @ 250Vdc |
| Long Term Stability (1 year) | -0.25 | | 0.25 | %Span | |
| Zero Thermal Error | -2.0 | | 2.0 | %Span | Over comp. temp |
| Span Thermal Error | -2.0 | | 2.0 | %Span | Over comp. temp |
| Zero Offset (mV Output) | -3.0 | | 3.0 | %Span | @ 25°C |
| Zero Offset (V Output) | -2.0 | | 2.0 | %Span | @ 25°C |
| Span Tolerance | -2.0 | | 2.0 | %Span | @ 25°C |
| Compensated Temperature | 0 | | 55 | °C | |
| Operating Temperature | -20 | | +85 | °C | |
| Storage Temperature | -40 | | +85 | °C | |
| Load Resistance (R _L , mV Output) | 1 | | | MΩ | |
| Load Resistance (R _L , V Output) | 5 | | | KΩ | |
| Response Time | | 1 | | ms | |
| Bandwidth | DC to 1KHz (typical) | | | | |
| Shock | 50g, 11 msec Half Sine Shock per MIL-STD-202G, Method 213B, Condition A | | | | |
| Vibration | ±20g, MIL-STD-810C, Procedure 514.2-2, Curve L | | | | |
| Wetted Material (except elastomer seal) | 17-4PH or 316L Stainless Steel | | | | |

For custom configurations, consult factory.

PERFORMANCE SPECIFICATIONS (DIGITAL)

Supply Voltage: 3.3V, Ambient Temperature: 25°C (unless otherwise specified)


| PARAMETERS | MIN | TYP | MAX | UNITS | NOTES |
|--|---|-------|-------|---------------|-----------------|
| Supply Voltage | 2.7 | | 5.0 | Vdc | |
| Output at Zero Pressure | 720 | 1000 | 1280 | Count | |
| Output at FS Pressure | 14720 | 15000 | 15280 | Count | |
| Current Consumption | | | 3.5 | mA | |
| Proof Pressure | 2X | | | Rated | |
| Burst Pressure | 5X | | | Rated | |
| Isolation, Body to Any Lead | 50 | | | MΩ | @ 250Vdc |
| Pressure Cycles | 1.00E+6 | | | 0-F.S. Cycles | |
| Pressure Accuracy (RSS combined Non Linearity, Hysteresis & Repeatability) | -1 | | 1 | %Span | BFSL @ 25°C |
| Temperature Accuracy | -3 | | 3 | °C | 1 |
| Zero Thermal Error | -2.0 | | 2.0 | %Span | Over comp. temp |
| Span Thermal Error | -2.0 | | 2.0 | %Span | Over comp. temp |
| Long Term Stability (1 year) | -0.25 | | 0.25 | %Span | @ 25°C |
| Compensated Temperature | 0 | | 55 | °C | |
| Compensated Temperature Output | 512 | | 1075 | Count | |
| Operating Temperature | -20 | | +85 | °C | |
| Storage Temperature | -40 | | +85 | °C | |
| Shock | 50g, 11 msec Half Sine Shock per MIL-STD-202G, Method 213B, Condition A | | | | |
| Vibration | ±20g, MIL-STD-810C, Procedure 514.2-2, Curve L | | | | |
| Wetted Material (except elastomer seal) | 17-4PH or 316L Stainless Steel | | | | |

For custom configurations, consult factory.

Notes

1. Pressure port temperature over compensated temperature range.

DIMENSIONS

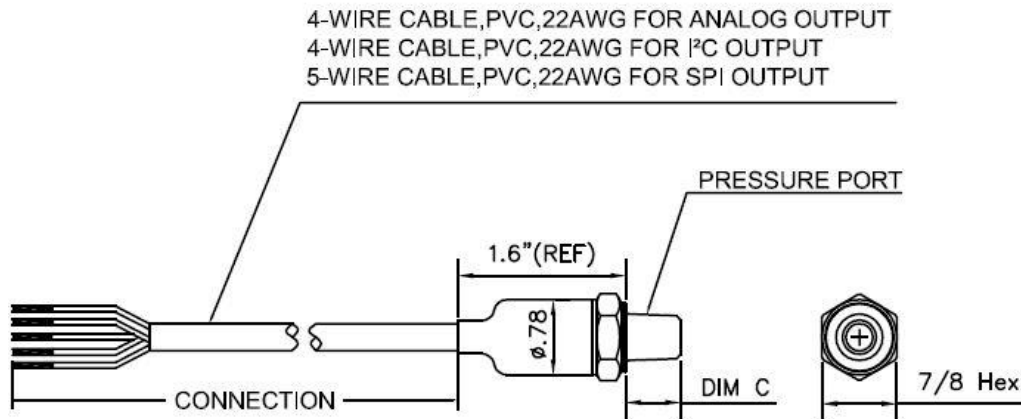

| CODE | PORT | DIM C |
|------|--|------------------|
| 2 | 1/4-19 BSPP | 0.453 [11.50] |
| 4 | 7/16-20 UNF-A MALE SAE J514 STRAIGHT THREAD O-RING BUNA-N 70SH-904, ID8.92mm x W1.83mm | 0.435 |
| | | [11.05] |
| 5 | 1/4-18 NPT | 0.596 [15.14] |
| 6 | 1/8-27 NPT | 0.475 [12.06] |
| E | 1/4-19 BSPT | 0.50 [12.70] |
| F | 1/4-19 BSPP FEMALE | 0.70 [17.78] |
| K | 1/8-27 NPT FEMALE | 0.70 [17.78] |
| P | 7/16-20 UNF-2A FEMALE SAE J514 STRAIGHT THREAD WITH INTEGRAL VALVE DEPRESSOR | 0.689 [17.50] |
| Q | M10 x 1.0 mm | 0.42 [10.67] |
| S | M12 x 1.5 mm | 0.53 [13.46] |
| U | G/14 DIN 3852 FORM E GASKET DIN3869-14 NBR | 0.547 [13.90] |
| W | M20 x 1.5 mm | 0.702 [17.83] |

| CODE | CONNECTION TYPE |
|------|-----------------|
| 1 | CABLE 2 FT |
| 2 | CABLE 4 FT |
| 3 | CABLE 10 FT |
| M | CABLE 1 M |
| N | CABLE 2 M |
| P | CABLE 5 M |
| R | CABLE 10 M |

OUTPUT (ANALOG)

| Code | Output | Supply | Ratiometricity | Red | Black | Green | White |
|------|------------|-----------|----------------|---------|---------|---------|---------|
| 1 | 0 – 50mV | 5V | Yes | +Supply | -Supply | +Output | -Output |
| 2 | 0 – 100mV | 5V | Yes | +Supply | -Supply | +Output | -Output |
| 3 | 0.5 – 4.5V | 5 ± 0.25V | Yes | +Supply | Common | Cut Off | +Output |
| 4 | 1 – 5V | 10 – 30V | No | +Supply | Common | Cut Off | +Output |
| 5 | 4 – 20mA | 9 – 30V | No | +Supply | -Supply | Cut Off | Cut Off |


OUTPUT (DIGITAL)

| Code | Output | Supply | Red | Black | Green | White | Yellow |
|------|--------|------------|---------|---------|-------|-------|--------|
| J | I²C | 2.7 – 5.0V | +Supply | -Supply | SCL | SDA | -- |
| S | SPI | 2.7 – 5.0V | +Supply | -Supply | SCLK | MISO | SS |

PRESSURE OUTPUT

SENSOR OUTPUT AT SIGNIFICANT PERCENTAGES

| % OUTPUT | DIGITAL COUNTS (DECIMAL) | DIGITAL COUNTS (HEX) |
|----------|--------------------------|----------------------|
| 0% | 1000 | 0 × 3E8 |
| 5% | 1700 | 0 × 6A4 |
| 10% | 2400 | 0 × 960 |
| 50% | 8000 | 0 × 1F40 |
| 90% | 13600 | 0 × 3520 |
| 95% | 14300 | 0 × 37DC |
| 100% | 15000 | 0 × 3A98 |

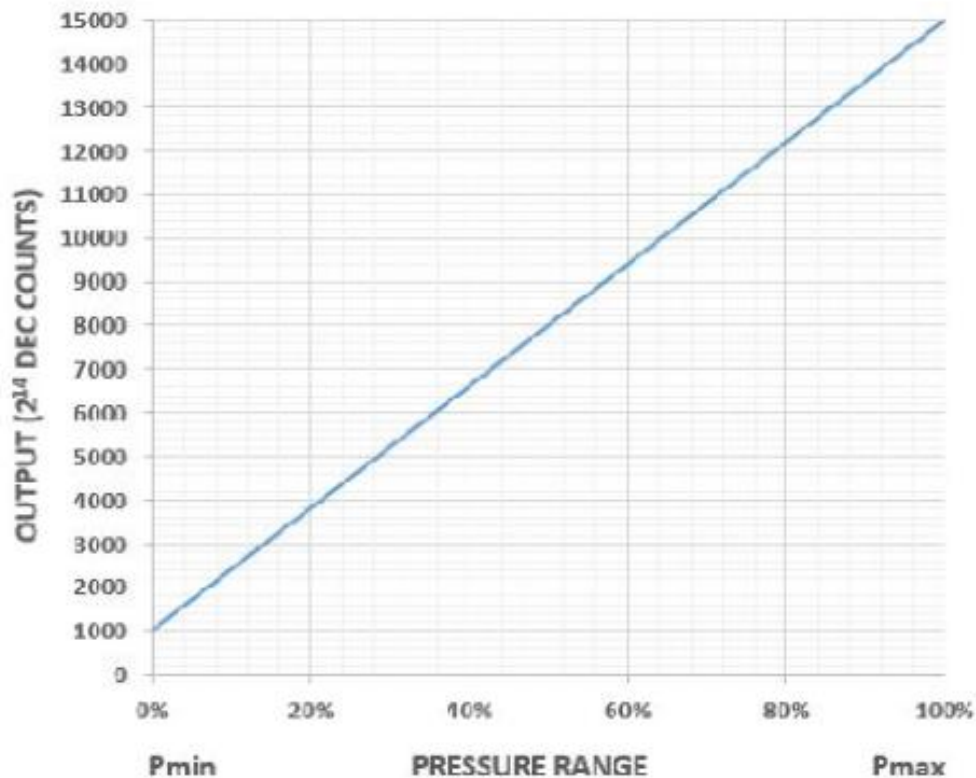


$$\text{OUTPUT (DECIMAL COUNTS)} = \frac{15000-1000}{P_{\text{max}} - P_{\text{min}}} \times (P_{\text{applied}} - P_{\text{min}}) + 1000$$

TEMPERATURE OUTPUT

TEMPERATURE OUTPUT

| OUTPUT °C | DIGITAL COUNTS (DECIMAL) | DIGITAL COUNTS (HEX) |
|-----------|--------------------------|----------------------|
| 0 | 512 | 0 × 200 |
| 10 | 614 | 1 × 266 |
| 25 | 767 | 2 × 2FF |
| 40 | 921 | 3 × 399 |
| 55 | 1075 | 4 × 433 |

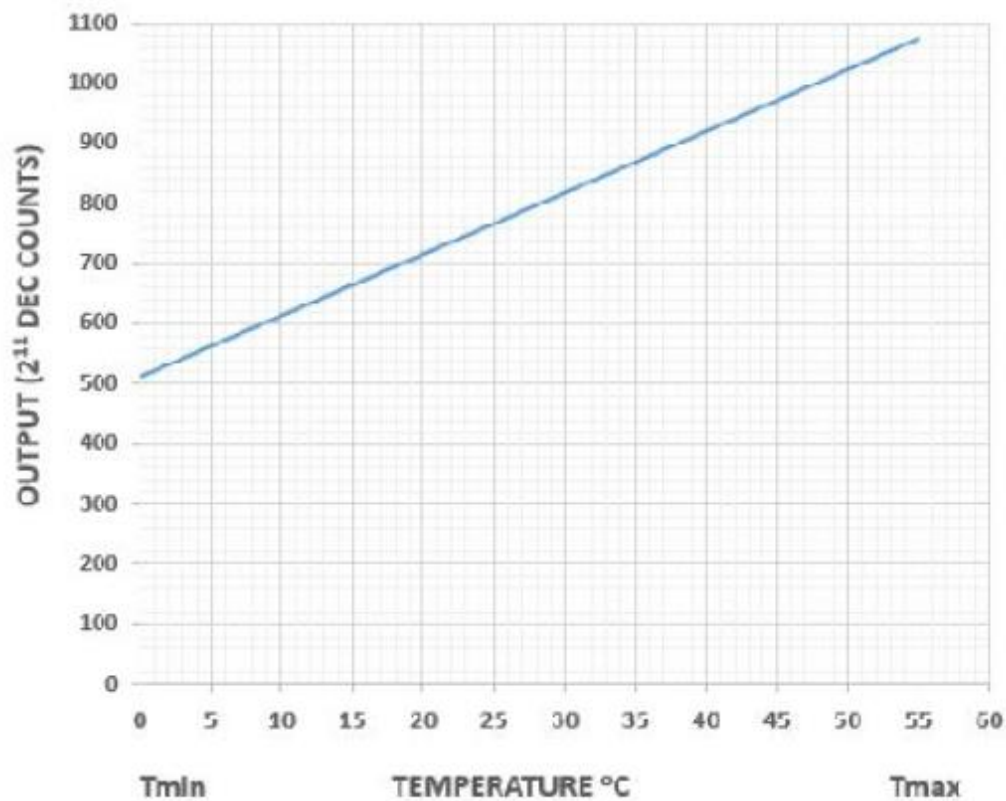

$$\text{OUTPUT (DECIMAL COUNTS)} = \frac{(\text{OUTPUT}^{\circ\text{C}} + 50^{\circ\text{C}}) \times 2048}{150^{\circ\text{C}} - (-50^{\circ\text{C}})}$$

ORDERING INFORMATION

| M30 | 2 | 1 | - | 0 | 0 | 0 | 0 | 0 | 5 | - | 100P | G | |
|------------|---|---|---|--|---|----------|---|---|--|---|---|---|--|
| Model | Output | Connection Type | - | Port Material | Oxygen Clean | 0 | Sleep Mode (Digital Only) | Address for I ² C (Digital Only) | Pressure Port | - | Pressure Range | Pressure Type | |
| M30 | 1 = 0 – 50mV 2 = 0 – 100mV 3 = 0.5 – 4.5V 4 = 1 – 5V 5 = 4 – 20mA J = I ² C S = SPI | 1 = Cable 2 ft 2 = Cable 4 ft 3 = Cable 10 ft M = Cable 1 m N = Cable 2 m P = Cable 5 m R = Cable 10 m | - | 0 = 17-4PH SS 1 = 316L SS | 0 = No Selection 1 = Oxygen Clean B40.1 Level IV | 0 | 0 = Without Sleep Mode 1 = With Sleep Mode (If Analog, use "0") | 0 = 0x28H 1 = 0x36H 2 = 0x46H 3 = 0x48H 4 = 0x51H (If Analog or SPI, use "0") | 2 = 1/4-19 BSPP 4 = 7/16-20 UNF-2A Male SAE J514 Straight Thread O-Ring BUNA-N 70SH-904, ID8.92mm x W1.83mm 5 = 1/4-18 NPT 6 = 1/8-27 NPT E = 1/4-19 BSPT F = 1/4-19 BSPP Female K = 1/8-27 NPT Female P = 7/16-20 UNF-2A Female SAE J514 Straight Thread with Integral Valve Depressor Q = M10 x 1.0 mm S = M12 x 1.5 mm U = G1/4 DIN 3852 Form E Gasket DIN3869-14 NBR W = M20 x 1.5 mm | - | 100P 200P 300P 500P 01KP 03KP 05KP 10KP 15KP | 007B 010B 020B 035B 070B 200B 350B 700B 01KB | G = Gage C = Compound |