


TES0902

NDIR CO2 GAS SENSOR (Dual-channel detector)

- Standard : 400 to 5,000ppm
- Optional : 0 to 5,000ppm
- TES0902-M10 : 400 to 10,000ppm

CREATE
NEW ENVIRONMENT !
REALIZE
YOUR HEALTHY LIFE !

"The TES0902 sensor that can be easily and conveniently applied to HVAC systems, CO2 transmitters, smart farms"

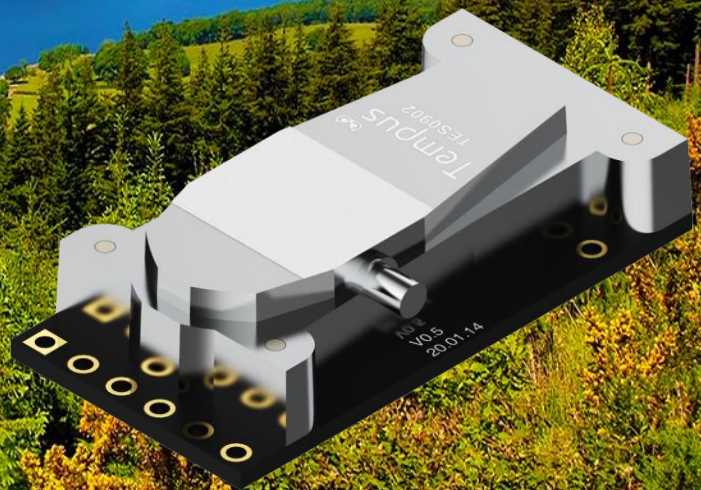

KEY POINTS

- Ultra small size, Easy integration, Quick response time, High accuracy
- Sensor suitable for long-term testing with excellent stability and accuracy
- Pre-calibrated and ready-to-use
- Applicable to user's various applications and devices
- Suitable for HVAC systems, indoor air quality systems, smart farms, etc.

iSweek www.isweek.com

Add: 16/F, Bldg. #3, Zhongke Mansion, No.1 Hi-Tech S. Rd, Hi-Tech Park South, Shenzhen, Guangdong, 518067 P.R.China

Tel: + 86-755-83289036

Fax: + 86-755-83289052

E-mail: sales@isweek.com

TES0902

NDIR CO2 GAS SENSOR (Dual-channel detector)


- Standard : 400 to 5,000ppm
- Optional : 0 to 5,000ppm
- TES0902-M10 : 400 to 10,000ppm



IAQ(Indoor Air Quality)

MODERN PEOPLE STAYING INDOORS FOR A CONSIDERABLE AMOUNT OF TIME PER DAY

CO2 is the standard indoor ventilation gas specified by the International Energy Agency (IEA). If the concentration is high, it is harmful to health.



| | |
|---------------------|---|
| Should be <1,000ppm | CO2 concentration(Indoor air quality) of multi-us facilities including schools and medical institutions |
| 400ppm | Normal concentration of CO2 in outside air |
| >1,000ppm | Decreased concentration, productivity, and learning ability |
| >2,000ppm | Drowsiness appears |
| >5,000ppm | Feel lack of Oxygen |

RECOMMENDATION

TES0902 (Standard) : 400 to 5,000ppm
 TES0902 -M10 : 400 to 10,000ppm

- HVAC system
- Ventilation
- CO2 transmitter
- Air purifiers
- Air conditioners
- Kitchen hood
- IoT devices
- Smart home
- IAQ control

Even users who are not familiar with the severity of CO2 gas can check when ventilation is necessary through the color displayed on the ventilation system screen or the alarm sound.

Ventilation is possible whenever a high CO2 concentration is measured through an HVAC system with built-in CO2 sensor.

Ventilation is very important. If there is ventilation system that can measure CO2, it automatically ventilates according to the CO2 concentration.

- ✓ Fresh and clean air enters the room and polluted air is discharged outside
- ✓ Reduce heating costs
- ✓ Increase student performance and attendance Improve respiratory health

* Note: The application examples provided in this flyer are for reference only. In practical application, please contact Tempus before using the product.

TES0902

NDIR CO2 GAS SENSOR (Dual-channel detector)

- Standard : 400 to 5,000ppm
- Optional : 0 to 5,000ppm
- TES0902-M10 : 400 to 10,000ppm




SMART FARM : Fresher !

TES0902, AN NDIR CO2 GAS SENSOR THAT HELPS IMPROVE PLANT GROWTH

CO2 is very important for plant growth. We can check the CO2 level through our dual channel NDIR CO2 sensor TES0902 for optimal yield.

CO2 gas is also a feedstock for photosynthesis. Increasing CO2 gas not only accelerates plant growth, but also potentially increases agricultural productivity.


Experiments conducted in greenhouse and growth chamber conditions have shown that doubling the Co2 concentration increases crop yields by over 30% on average.



RECOMMENDATION

TES0902 (Standard) : 400 to 5,000ppm
TES0902 (Optional) : 0 to 5,000ppm

- *Manual calibration function*
- *Dual channel CO2 detector*
- *Smart farm*
- *Greenhouse*
- *Mushroom, Strawberry, Lettuce, etc.*
- ✓ *If plants receive too much CO2, they will slow or stop photosynthesis.*
- ✓ *Users can check the required CO2 concentration level and provide appropriate CO2 gas for plant growth. This accelerates plant photosynthesis, which increases plant growth and yield.*

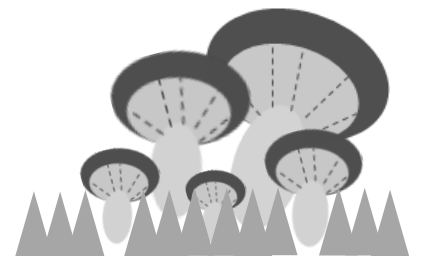

TES0902

NDIR CO2 GAS SENSOR (Dual-channel detector)

- Standard : 400 to 5,000ppm
- Optional : 0 to 5,000ppm
- TES0902-M10 : 400 to 10,000ppm



AUTOMOTIVE : Be Safe !

REAL TIME MONITORING CO2 CONCENTRATION INSIDE A CAR

CO2 concentration is recommended to be less than 1000ppm. Inhaling 2000ppm or more CO2 for a long-time will affect the human body.

Driving without opening the window for a long time can cause drowsiness and increase breathing and pulse.


Children and older people are at greater risk of suffocation when turning on the heater and air conditioner.

That is why it is important to monitor the CO2 concentration in small spaces.

RECOMMENDATION

TES0902 (Standard) : 400 to 5,000ppm
TES0902 -M10 : 400 to 10,000ppm

- *Manual calibration function*
- *Dual channel CO2 detector*
- *Prevention of drowsiness driving, and car accident caused by increase of carbon dioxide.*
- *Ventilation notification function*
- ✓ *By connecting a TES0902 sensor to an in-car accessory such as a black box, you can make it show the CO2 concentration changes on the screen and guide the room ventilation periodically/repeatedly if necessary.*
- ✓ *It prevents driver's drowsiness factors in advance, reduces risk of accidents and helps to drive safely.*

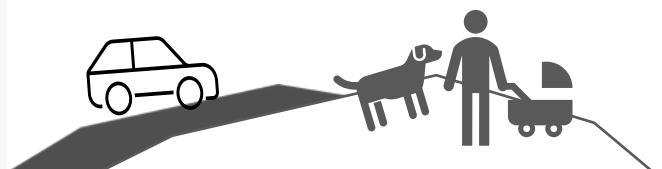

* Note: The application examples provided in this flyer are for reference only. In practical application, please contact Tempus before using the product.

isweek www.isweek.com

Add: 16/F, Bldg. #3, Zhongke Mansion, No.1 Hi-Tech S. Rd, Hi-Tech Park South, Shenzhen, Guangdong, 518067 P.R.China

Tel: + 86-755-83289036

Fax: + 86-755-83289052



E-mail: sales@isweek.com

TES0902

NDIR CO2 GAS SENSOR (Dual-channel detector)

- Standard : 400 to 5,000ppm
- Optional : 0 to 5,000ppm
- TES0902-M10 : 400 to 10,000ppm

TES0902 VIEWED FROM VARIOUS ANGLES

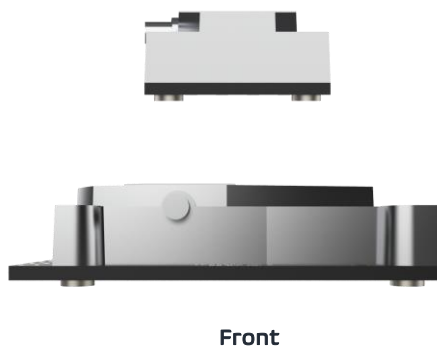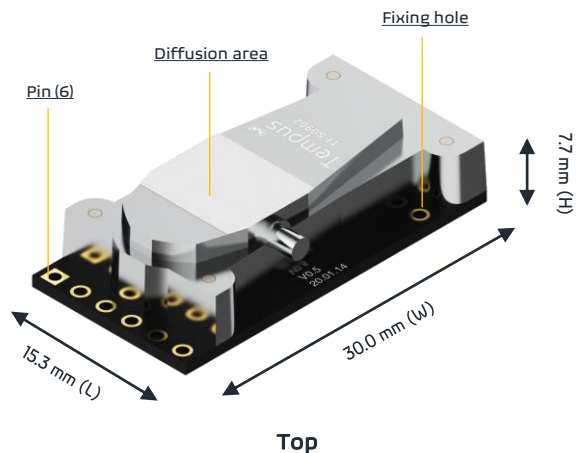

BENEFITS and PIN CONFIGURATION of TES0902

Various of measurement range

- 400 to 5,000ppm (option: 0 to 5,000ppm)
- *TES0902-M10 : 400 to 10,000ppm)

Smaller than other NDIR products (30 x 15.3 x 7.7 mm)

Cost effective. Best performance to price ratio

Inhouse digital dual-channel detector based on TEMPUS's micro-thermopile technology


Best temperature stability

Very long-term stability

Fully calibrated

Digital interface using RS232 and PWM

Short lead time

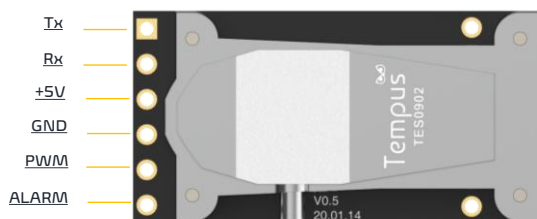

| Pin | Description |
|-------|--|
| TX | TX: 3.3V(Typ.) CMOS Level Signal |
| RX | RX: 3.3V(Typ.) CMOS Level Signal |
| +5V | +5V Input |
| GND | Ground |
| PWM | PWM Output: 3.3V(Typ.) CMOS Level Signal |
| ALARM | ALARM Signal |

* Note: Specification and pin configuration are subject to change without notice.

iSweek www.isweek.com

Add: 16/F, Bldg. #3, Zhongke Mansion, No.1 Hi-Tech S. Rd, Hi-Tech Park South, Shenzhen, Guangdong, 518067 P.R.China

Tel: + 86-755-83289036

Fax: + 86-755-83289052

E-mail: sales@isweek.com


TES0902

NDIR CO2 GAS SENSOR (Dual-channel detector)

- Standard : 400 to 5,000ppm
- Optional : 0 to 5,000ppm
- TES0902-M10 : 400 to 10,000ppm

SPECIFICATIONS

| | TES0902 | TES0902-M10 |
|----------------------------|---|---|
| Measurement Range | <i>(Standard)</i> 400 to 5,000 ppm <i>(Optional)</i> 0 to 5,000 ppm ⁽¹⁾ | 400 to 10,000 ppm |
| Accuracy | <i>(Standard)</i> ±(50ppm + 3 % of measured value) <i>(Optional)</i> ±(50ppm + 3 % of measured value) ⁽²⁾ | 400 to 5,000 ppm : ±(50ppm + 3 % of measured value) * 5,000 to 10,000 ppm : ±(50ppm +5% of measured value) |
| Size , Weight | 30.0mm (W) x 15.3mm (L) x 7.7mm (H) 2.7g | |
| Operating temperature | -10°C ~ 50°C (Non-condensing) | |
| Operating humidity | 0 ~ 95% RH (Non-condensing) | |
| Operating environment | Residential, Commercial spaces | |
| Storage temperature | -20°C ~ 80 °C (Non-condensing) | |
| Power Input | 5 VDC @5% (4.75Vdc ~ 5.25vdc) Average current 25.0 mA@5V IR Lamp On 120 mA@5V IR Lamp Off 10 mA@5V | |
| Output connector | 6 pins (Terminals not mounted) | |
| Digital output | RS232(UART), PWM, Alarm CMOS level output | |
| Calibration | ABC on by default | |
| Manual Calibration support | Yes (@400ppm, 25) | |

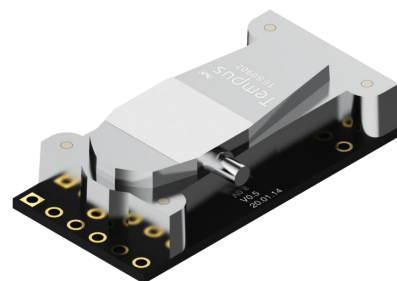

⁽¹⁾ Optional spec. Standard measurement range is from 400ppm to 5,000ppm

⁽²⁾ The stated accuracy is for 400-5000ppm. When Auto Background Calibration is in operation, exposure to an artificial low concentration environment (ex. below 400ppm) may affect the sensor accuracy.

In this case, it is recommended that the customer turn off the ABC automatic calibration function before using it.

* Note: Specification and pin configuration are subject to change without notice.

The above information is considered correct in the current version flyer. Tempus disclaims any liability arising from the provision, application or use of any information or product; all liability, including, but not limited to, special, consequential or incidental damages, all warranties, express, statutory, implied or explanatory, including warranties of fitness for a particular purpose, non-infringement and merchantability. Tempus reserves the right to change the above information at any time without notice. Users should get the latest version of the information to make sure this is the current version. The user must further determine the suitability of the product for application, including the required level of reliability, and whether it is suitable for a specific purpose. Tempus' products are intended for use in typical commercial applications. Unless otherwise agreed in writing, products are not designed, approved or warranted to be suitable for applications requiring extended temperature ranges and/or unusual environmental requirements. Tempus does not specifically recommend high reliability applications such as medical life support devices or life support equipment.

Copyright © Tempus Inc. 2021 All Rights Reserved.

No part of this document may be reproduced without the prior written consent of Tempus.

iSweek www.isweek.com

Add: 16/F, Bldg. #3, Zhongke Mansion, No.1 Hi-Tech S. Rd, Hi-Tech Park South, Shenzhen, Guangdong, 518067 P.R.China

Tel: + 86-755-83289036

Fax: + 86-755-83289052

E-mail: sales@isweek.com