



Product Data Sheet

FOUR ELECTRODE SO2 SENSOR (7E4-SO2-5) (PN: 056-0600-200)

Description

This 4-electrode sensor is designed for air quality monitoring to measure the low-concentration SO2 gas with ultra-high resolutions. The design optimizes the sensor sensitivity, accuracy and long-term stability and enables the sensor to detect ozone variations at parts per billion (ppb) levels.

Performance Characteristics

Nominal Range:	0 ~ 5 ppm
Maximum Overload:	20 ppm
Sensitivity (20°C):	$0.4 \pm 0.2 \mu\text{A/ppm}$
Response Time (T90):	≤ 60 s
Zero Signal (20°C):	< ±80 nA
Baseline Shift (-40°C ~ 50°C):	< 60 ppb (After compensation)
Resolution:	10 ppb
Linearity:	Linear up to 5 ppm
Bias Voltage:	0 mV

Environmental

Temperature Range:	-40°C ~ 50°C
Pressure Range:	1 ± 0.1 atm
Humidity Range:	15% ~ 90%RH non-condensing

Life Time

Long Time Output Drift:	< 2% signal/month
Recommended Storage Temp:	10°C ~ 30°C
Expected Operating Life:	3 years in clean air
Storage Life:	6 months in original packaging
Warranty:	24 months

Intrinsic Safety Data

< 0.2 mA
1.3 V
< 1.0 A


Physical Characteristics

Housing Material:	ABS
Weight (Nominal):	8 g
Orientation:	None

Installation

Output signals from the sensor pins are different. Inappropriate use of the pins in product design will affect the sensor functionality. Exposure to high concentrations of solvent vapors should be avoided under any condition. Mechanical overstress may cause deformation or cracks of the plastic enclosure of the sensor. If the sensor is used in extreme environmental conditions, please contact us for more details.

Product Dimensions

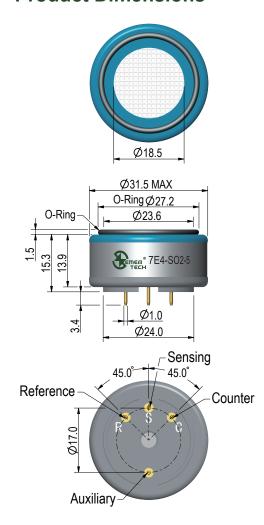

All dimensions in mm
All tolerances ±0.10mm unless otherwise stated

Note

The performance data in this document are conducted by using SemeaTech recommended test circuitry and test environment at 20°C, 50%RH and 1 atm. Sensor performance varies under different environmental conditions. Please contact us if you need more details.

ISweek www.isweek.com





Product Data Sheet


FOUR ELECTRODE SO2 SENSOR (7E4-SO2-5) (PN: 056-0600-200)

· Cross-Sensitivity Data

Gas	Concentration (ppm)	Output Signal (ppm SO2 equivalent)
Carbon Monoxide	300	< 3.0
Hydrogen Sulfide	15	0.0
Nitric Oxide	35	0.0
Nitrogen Dioxide	5	-5.0

Note: The cross sensitivities include but not limited to the above gases. It may also respond to other gases. The data in the table above may vary from different batches of sensors and the changes of test environment. Calibration using the gases that have the cross sensitivities to this sensor is not recommended.

Temperature Data

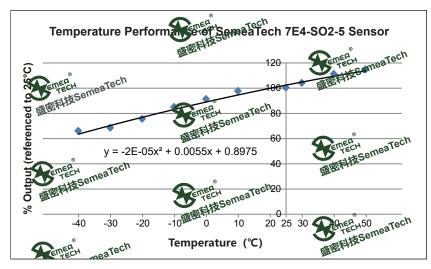

Safety Note

This sensor is designed to be used in certain instruments for life critical applications. To ensure the sensor functioning per its specifications inside the instrument, it is required to read the instrument user's guide carefully and comply with the calibration procedures by using certified target calibration gas before each use. Failure to do so may cause serious injury and fatality. Please do not open the sensor plastic enclosure because the electrolyte and other chemicals stored inside are harmful.

It is highly recommended for customers to validate the sensor performance using the document as a reference for their product designs or applications.

This product data sheet is used for reference only.

SemeaTech is committed to provide its customers the most accurate data based on its best knowledge. SemeaTech does not provide product warranty for failures of using its products in accordance with product specifications that are described in the data sheet, or other misuse, abuse, negligence to the product.

ISweek www.isweek.com